
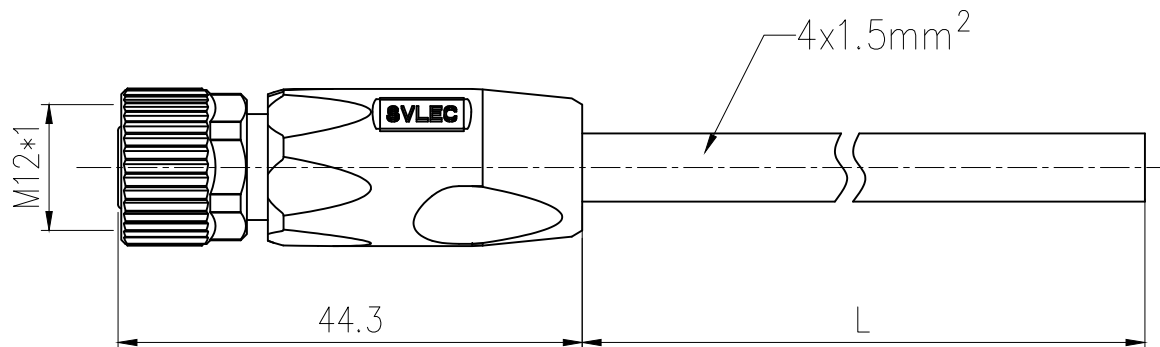




材料和技术参数(Material&Technical data):

金属件(Metallic parts): 锌合金(Zinc alloy)

接触件(Contact): 铜镀金(Copper plated)

密封件材质(Seal material): NBR

插芯材质(Core insert material): PA

包胶体(Encapsulated colloid): TPU Black

电缆护套(Cable jacket): PVC/PUR Shield

电缆号(Cable number): 901/902

额定电压(Rated voltage): 630V AC/DC

额定脉冲电压(Rated pulse voltage): 1500V

额定电流(Rated current)(40°C): max.16A

温度范围(Temperature range): -25...+80°C

防护等级(Protection): IP67(插孔插针配合拧紧)(EN 60529)

When plugged and screwed down


执行标准(Executive standard): IEC 61076-2-111

导体横截面(CSA): 4x1.5mm²

绝缘电阻(Insulation resistance): ≥100MΩ

接触电阻(Touch resistance): ≤5mΩ


可插拔次数(Number of pluggable times): ≥ 100

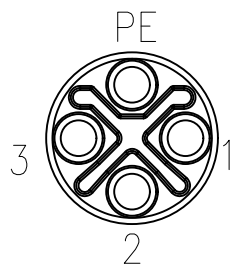

S扣母插孔图

S Coded Female

接线图:
Circuit Diagram:

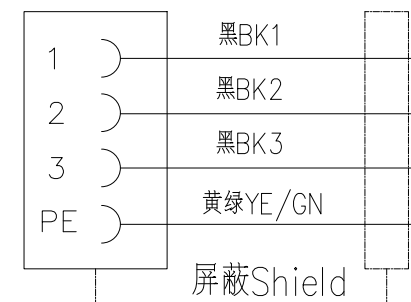

				MATERIAL : SEE TABLE		兴威联电气 —SVLEC—	
				FINISH : SEE TABLE			
SIGN	REVISION	NAME	DATE	DRAWN BY:WYL	CHK'D BY:		
				APP'D BY :	SCALE : 1 : 1	TITLE: M12—S扣4芯顶铸直型屏蔽母插	
				SHEET 1 OF 1	UNIT : mm	DWG. NO.: 913334—XXX—L	
				DATE :	DAN :	REV AX	
DIMENSION CLASSIFICATION						SVL\P\M12	
5		4		3		2	