


M23X Series Connector

Newly Upgraded Power & Signal connectors



- Features:
- Easy and Reliable installation
 - Removable Earthing structure
 - 330° rotatable design for Angled connector
 - Crimp Termination (pin/contact removable)

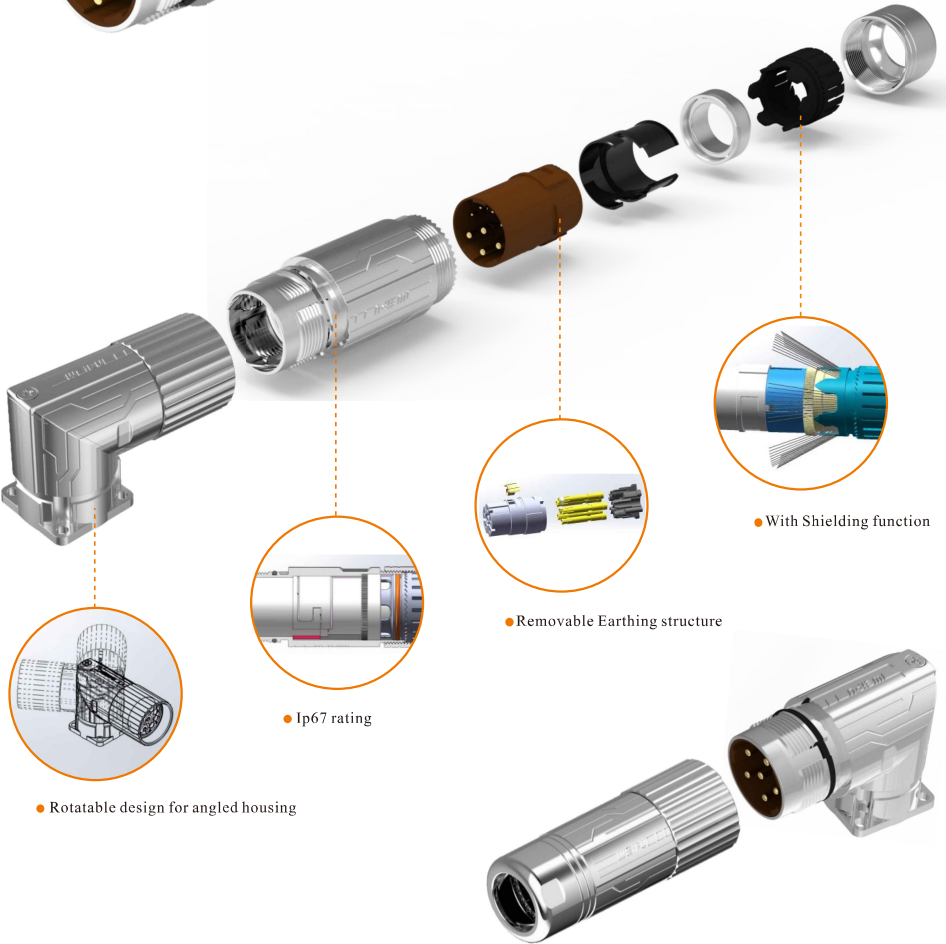

● M23X for power

Material and spec	
Shell material	Zinc alloy with nickel plating
Contact material	Brass with gold plating
Insert material	PA66
Insulation resistance	$>10^{13} \text{ m}\Omega$
Termination	Crimp
Temperature range	$-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Mating cycle	1000
Cable outer diameter range	I: 4.5-8mm II: 8-13mm III: 12-15mm
IP rating	IP67
Coupling	Threaded coupling

