



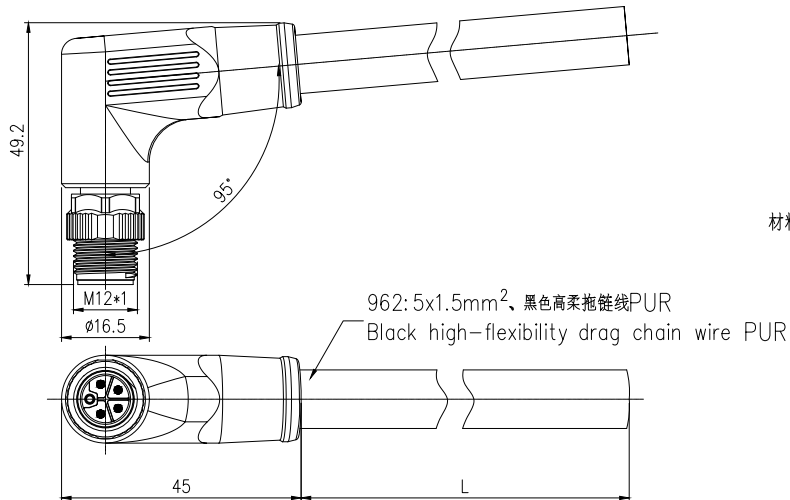

接线图:
Circuit Diagram:

1	棕BN
2	白WH
3	蓝BU
4	黑BK
PE	黄绿YEGN



SIGN	REVISION	NAME	DATE	
DIMENSION CLASSIFICATION				

材料和技术参数(Material&Technical data):

金属件(Metallic parts): 锌合金(Zinc alloy)
接触件(Contact): 铜镀金(Copper plated)
插芯材质(Core insert material): PA
包胶体(Encapsulated colloid): TPU Black
电缆护套(Cable jacket): 黑色Black PUR
电缆号(Cable number): 962
额定电压(Rated voltage): 63V AC/DC
额定脉冲电压(Rated pulse voltage): 1.5KV
额定电流(Rated current)(40°C): max.12A
温度范围(Temperature range): -25...+80°C
防护等级(Protection): IP67(插孔插针配合拧紧)(EN 60529)
When plugged and screwed down
执行标准(Executive standard): IEC 61076-2-111
导体横截面(CSA): 5x1.5mm²
绝缘电阻(Insulation resistance): ≥100MΩ
接触电阻(Touch resistance): ≤5mΩ
可插拔次数(Number of pluggable times): ≥ 100

MATERIAL : SEE TABLE

FINISH : SEE TABLE

DRAWN BY:WYL CHK'D BY:

APP'D BY: SCALE : 1 : 1

SHEET 1 OF 1 UNIT : mm

DATE : DAN :

兴威联电气
—SVLEC—

TITLE: M12-L扣5芯预铸95°弯角公插

DWG. NO.: 912555-962-L

REV
AX

SVL\P\M12