


REK Plastic Accessories — Reducers—Metric thread

CE RoHS **IP56**



Material: PA
IP rating: IP56 / IP68 with O-ring
Working temperature: -40°C to 100°C
Color: Black(RAL9005), Grey(RAL7035)
Fire resistance: UL94-V2

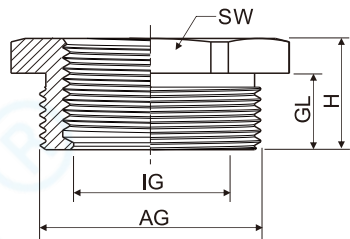

P/N	Thread Size AG	Thread Size IG	GL mm	H mm	SW mm	Reference No. (Grey)	Reference No. (Black)	
REK.M16(B/G)	M16X1.5	M12X1.5	8	12	18	9 00 007 0160 1	9 00 007 0160 2	100
REK.M20(B/G)	M20X1.5	M16X1.5	9	13	24	9 00 007 0200 1	9 00 007 0200 2	100
REK.M25(B/G)	M25X1.5	M20X1.5	11	16	29	9 00 007 0250 1	9 00 007 0250 2	50
REK.M32(B/G)	M32X1.5	M25X1.5	11	16	36	9 00 007 0320 1	9 00 007 0320 2	50
REK.M40(B/G)	M40X1.5	M32X1.5	13	19	45	9 00 007 0400 1	9 00 007 0400 2	30
REK.M50(B/G)	M50X1.5	M40X1.5	14	22	55	9 00 007 0500 1	9 00 007 0500 2	30
REK.M63(B/G)	M63X1.5	M50X1.5	15	24	68	9 00 007 0630 1	9 00 007 0630 2	10

Recommended accessories:




REK Plastic Accessories — Reducers-PG thread

CE RoHS **IP56**



Material: PA
 IP rating: IP56 / IP68 with O-ring
 Working temperature: -40°C to 100°C
 Color: Black(RAL9005), Grey(RAL7035)
 Fire resistance: UL94-V2

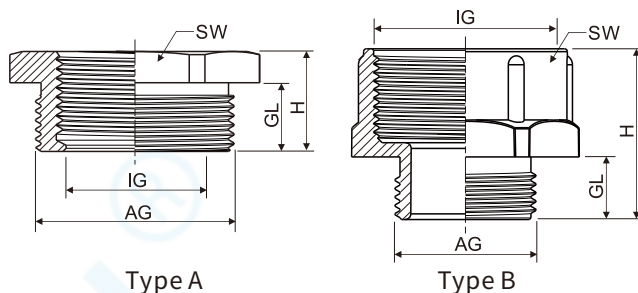

P/N	Thread Size AG	Thread Size IG	GL mm	H mm	SW mm	Type	Reference No. (Grey)	Reference No. (Black)	
REK.PG9(B/G)	PG9	PG7	8	12	18	B	9 00 007 1090 1	900 007 1090 2	100
REK.PG11(B/G)	PG11	PG9	8	12	22	B	9 00 007 1110 1	900 007 1110 2	100
REK.PG13.5(B/G)	PG13.5	PG11	9	14	24	B	9 00 007 1130 1	900 007 1130 2	100
REK.PG16(B/G)	PG16	PG13.5	9	14	23	B	9 00 007 1160 1	900 007 1160 2	100
REK.PG21(B/G)	PG21	PG16	10	16	27	A	9 00 007 1210 1	900 007 1210 2	50
REK.PG29(B/G)	PG29	PG21	11	16	33	A	9 00 007 1290 1	900 007 1290 2	50
REK.PG36(B/G)	PG36	PG29	11	17	40	A	9 00 007 1360 1	900 007 1360 2	30

Recommended accessories:



P112